

HiLux Pro Series

Full HD, GOB Fine Pitch | Indoor LED Video Wall



High-precision
Design



HDR technology
Up to 8K resolution



16:9 ratio
Size:600x337.5mm



Convenient
Installation

► Various applications



Monitoring room / Corporate / Meeting room / broadcasting /TV studio / Cinema

Design and Maintenance



High-precision

Die-casting the whole panel



Power box built -in

Fast and simple installation



5.5KG

Ultra slim




Cableless

Convenience and stable

16:9 ratio in Panel design, native 4K

Standard 27", FHD/4K pixel to pixel

Panel size: 600x337.5mm (23.6" x 13.2")

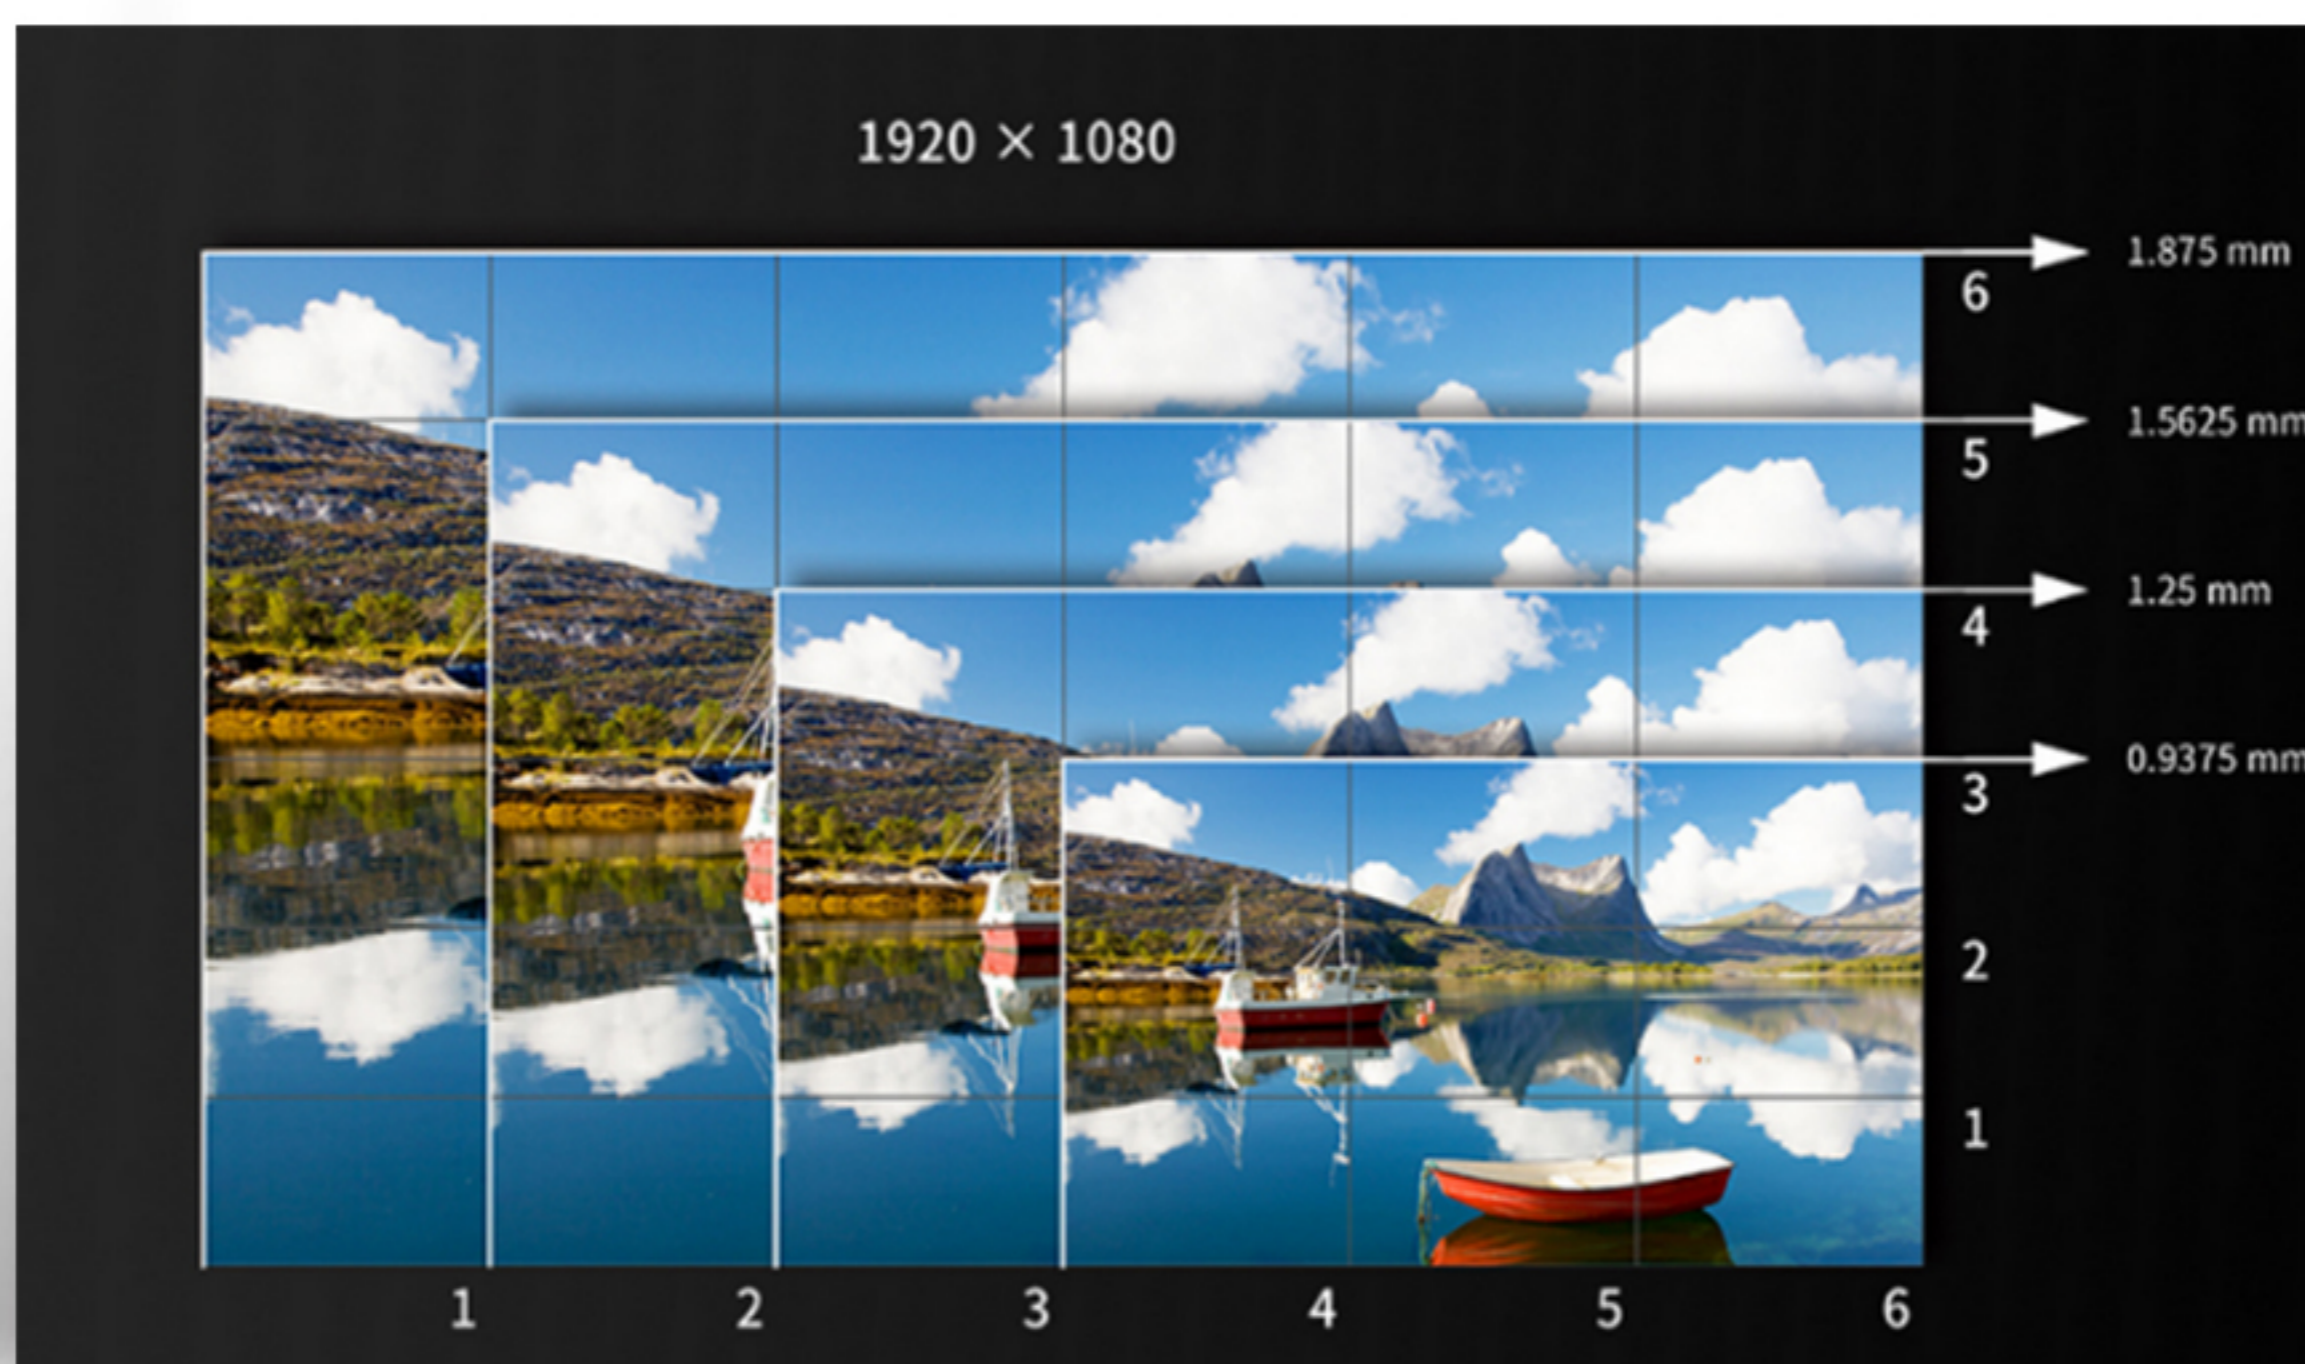

Perfection in visual performance



- Standard 16:9 ratio in panel design, native 4K
- True Color, perfection in visual performance
- GOB Technology- waterproof & anti-crash, High contrast, increase 20% contrast

▶ Technical Specifications

Model	P0.9	P1.25	P1.56	P1.87
Pixel Pitch	0.93mm	1.25mm	1.56mm	1.87mm
LED lamp	Mini 4in1	SMD1010	SMD1212	SMD1515
Density(dots/ m ²)	1152000	640000	409600	285967
Module size (mm)	300 ×168.75	300 ×168.75	300 ×168.75	300 ×168.75
Module resolution (pixels)	320 x 180	240 x 135	192 x 108	160 x 90
Cabinet size (mm)	600x337.5	600x337.5	600x337.5	600x337.5
Cabinet resolution (pixels)	640 x 360	480 x 270	384 x 216	320 x 180
Cabinet Weight (kg)	5.8	5.6	5.5	5.5
Viewing angle	H:160°, V:160°	H:160°, V:160°	H:160°, V:160°	H:160°, V:160°
Refresh rate	3840Hz	3840Hz	3840Hz	3840Hz
Brightness	600cd/ m ²	600cd/ m ²	600-800cd/ m ²	600-800cd/ m ²
Power Consumption (max. / avg.)	550W / 220W			
Grey level	16bit			
Input voltage	AC220V/50Hz			
Maintenance way	Front			
Ingress Protection	IP43			
Working Temp	-20°C~+45°C			
Working Humidity	10%~60%RH			
Certification	ETL/FCC/CE/CCC			

Shenzhen SoStron Technology Co.,Ltd

Building D, SanMin Industrial Park, Shilongzai, Shiyan Town, Baoan District, Shenzhen, China

Contact us +86 755 2334 3844 info@sostron.com

www.sostron.com