


hiLux Series

Fine Pitch | Vibrant LED Wall



Ultra light
and slim

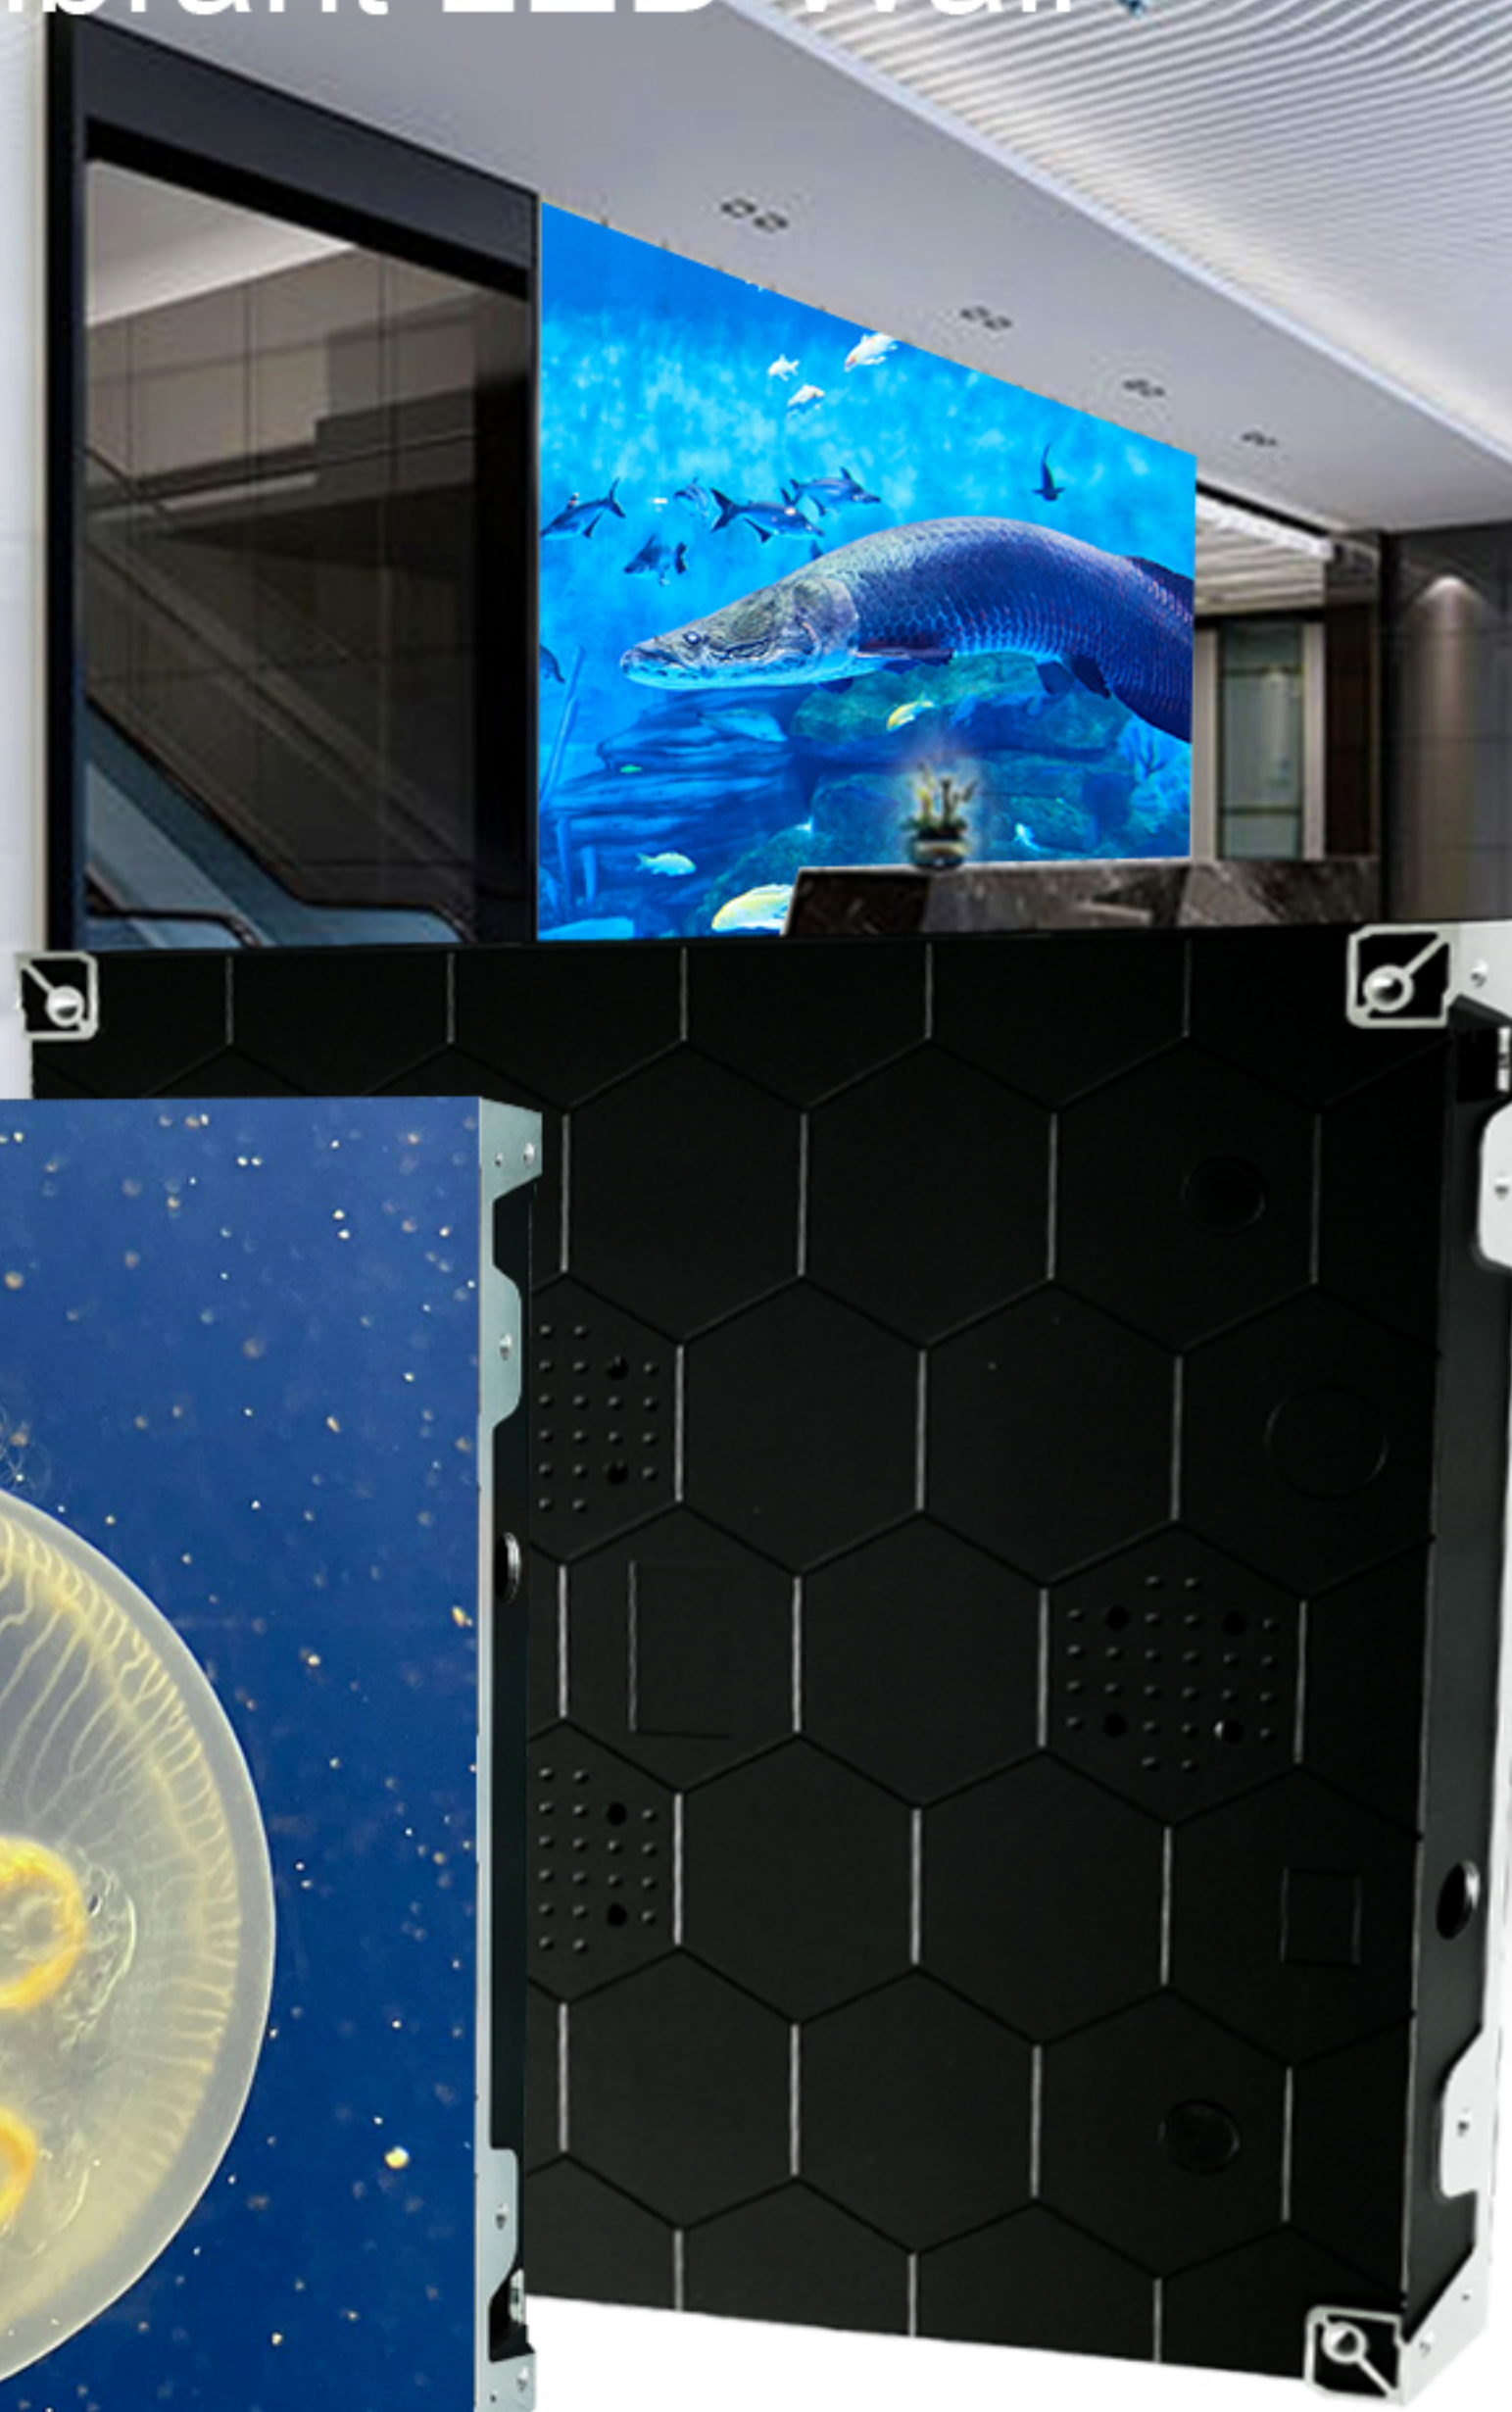

Stable and
Reliable



Great Visual
Performance



Low cost-of-
ownership

► Various applications



Shopping mall / meeting room / retail / training / public transport / entrance /Lobby

Design and Maintenance



Modular design

Save on spare parts




Ultra-slim frame

5kgs/panel



Fast and Seamless

Special slot to make
easy installation

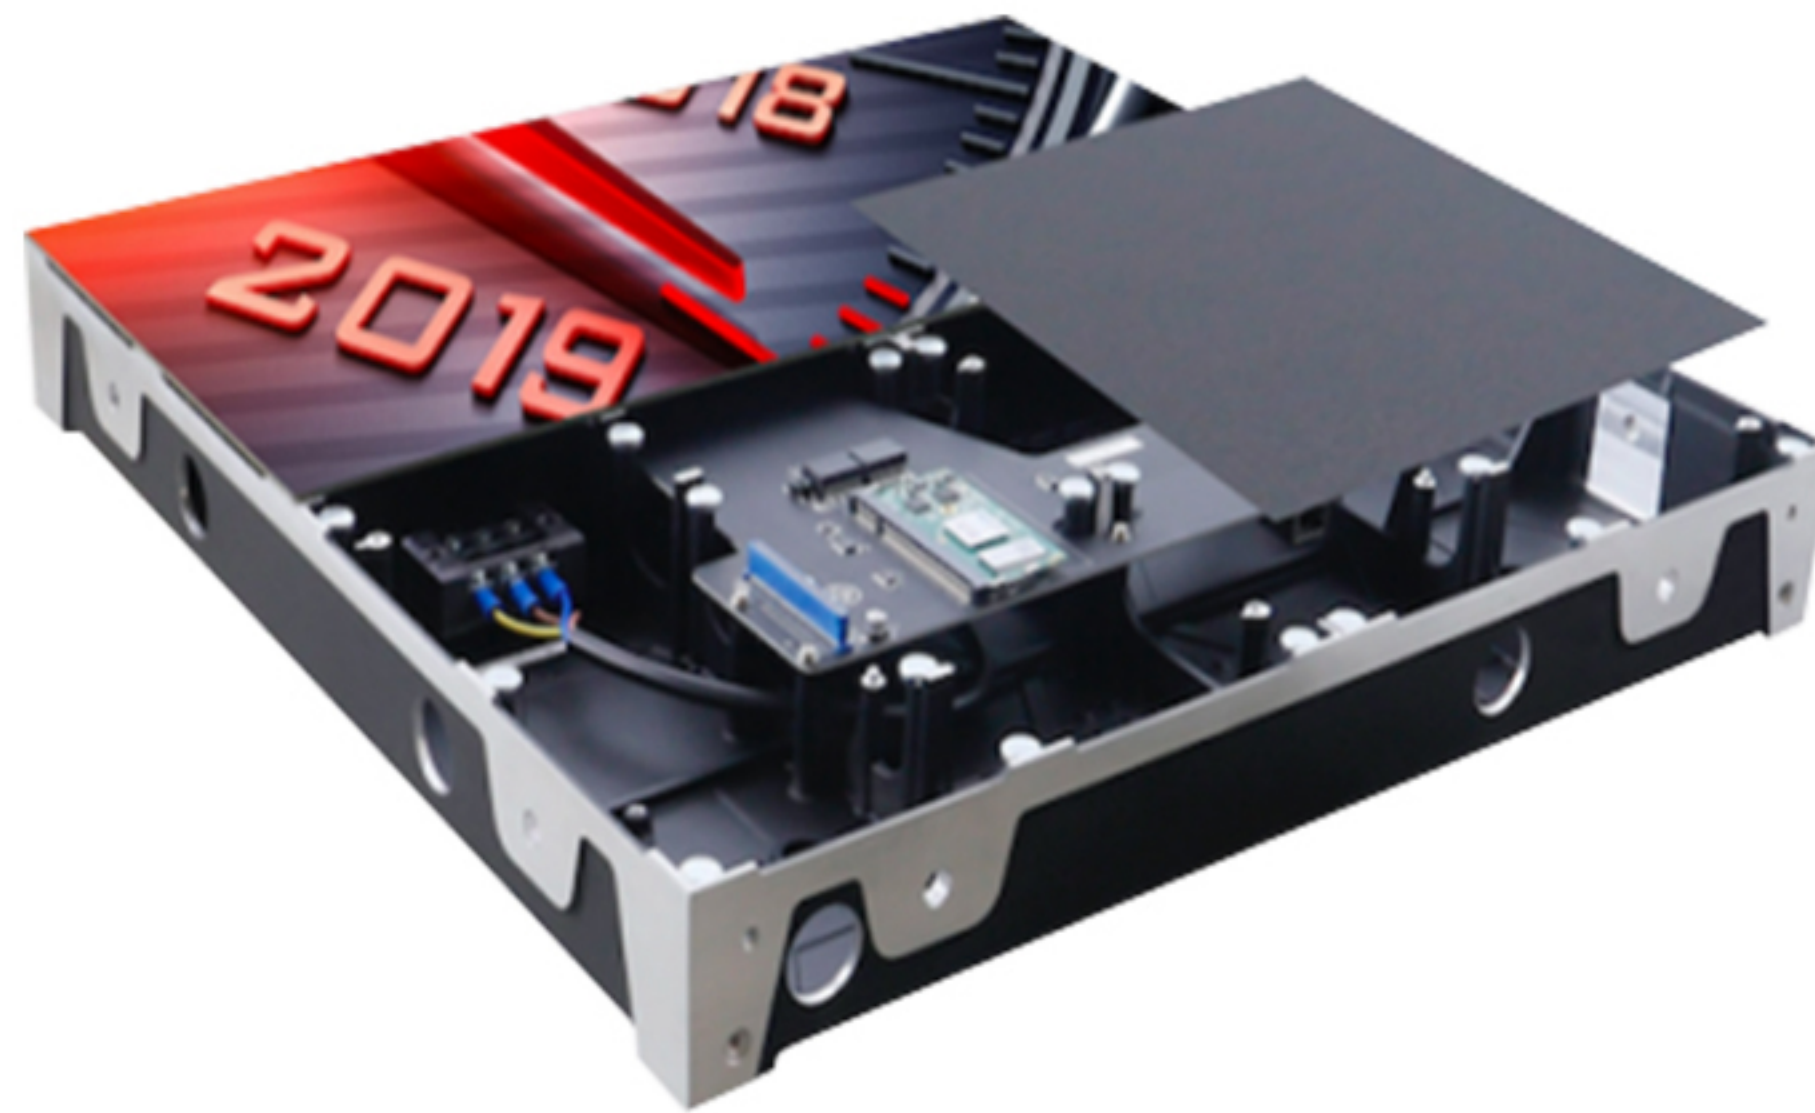

Support mixed assembly

Size: 480 x 480mm

960 x 480mm



High-precision

Die-casting aluminum whole
panel



Special mounting frame

Convenient, easy installation

Great Visual Performance



High Definition



3840 Hz

High refresh rate



High Reliability



High Contrast



Uniformity



Extended LED Life cycle

Energy saving and efficient
heat-dissipation

More functions

- GOB technology
- Increase collision resistance, protecting LEDs from being knocked out
- High contrast, increase 20% contrast.



► Technical Specifications

Model	P1.29	P1.57	P1.87	P2.5
Pixel Pitch	1.29mm	1.57mm	1.87mm	2.5mm
LED lamp	SMD1010	SMD1212	SMD1515	SMD2121
Density(dots/ m ²)	600925	401084	284444	160000
Module size (mm)	240x240	240x240	240x240	240x240
Module resolution (pixels)	186x186	152x152	128x128	96x96
Cabinet size (mm)	960/480 x 480	960/480 x 480	960/480 x 480	960/480 x 480
Cabinet resolution (pixels)	744/372 x 372	608/304 x 304	512/256 x 256	384/192 x 192
Cabinet Weight (kg)	12KGS / 6KGS			
Viewing angle	H:160°, V:160°			
Refresh rate	3840Hz			
Brightness	600nit – 800nit			
Power Consumption (max. / avg.)	600W / 220W			
Grey level	16bit			
Input voltage	AC220V/50Hz			
Maintenance way	Front			
Ingress Protection	IP43			
Working Temp	-20°C~+45°C			
Working Humidity	10%~60%RH			
Certification	ETL/FCC/CE/CCC			

Shenzhen SoStron Technology Co.,Ltd

Building D, SanMin Industrial Park, Shilongzai, Shiyan Town, Baoan District, Shenzhen, China

Contact us +86 755 2334 3844 info@sostron.com www.sostron.com